






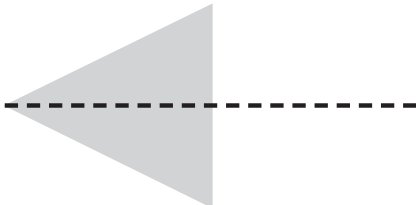


# IR SUB-MODE DESCRIPTIONS, OPERATIONAL **MAWL-C1+**

**TABLE 3-5 - MAWL-C1+ IR Sub-Mode Depiction**

<b>TRIPLE-CLICK</b>	(A)		67 mW 2° Illuminator + 0.7 mW Pointer
	(B)		0.7 mW Pointer
<b>LONG</b>	A		50 mW 2° Illuminator + 0.7 mW Pointer
	B		65 mW 10° Illuminator + 0.7 mW Pointer
<b>MID</b>	A		17 mW 2° Illuminator + 0.7 mW Pointer
	B		13 mW 10° Illuminator + 0.4 mW Pointer
<b>SHORT</b>	A		0.25 mW Pointer
	B		5 mW 60° Illuminator + 0.25 mW Pointer

DIVERGENCE AND  
RELATIVE RANGES NOT  
TO SCALE.